



SAFETY GUARD FOR PRESSES

MODEL NO'S: **YKGS20, 30, 50, 75**

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.



Refer to instruction manual

1. SAFETY


- ✓ Regularly check guard for worn, loose, or damaged parts. If you find any of these conditions **DO NOT USE THE GUARD.** Failure to do so may cause severe injury!
- ✓ Keep the guard free of dirt and debris.
- ✗ **DO NOT** add to or modify any part of the guard. Doing so will void your warranty.
- ✗ **DO NOT** use the guard for purposes other than those it was designed for.
- ✓ Clean guard with water and mild detergent.
- ✓ Always refer to the safety instructions provided in your floor press instruction manual.
- ☐ **WARNING!** The warnings, cautions and instructions referred to in this manual cannot cover all possible conditions and situations that may occur. It must be understood that common sense and caution are factors which cannot be built into this product, but must be applied by the operator.

2. INTRODUCTION

Lightweight aluminium frame with tough steel mesh. Adjustable guard protects the user and/or passer by from being injured if workpiece is accidentally dislodged under load. Bolts onto either side of the table and features five height increments, allowing the workpiece to be placed onto table with no obstruction. One-way spring loaded locking clips then allow the guard to be pulled up quickly and snap straight into position for full protection.




3. SPECIFICATION

Model No: YKSG20
 Applications: YK209F, YK20FFP
 Model No: YKSG30
 Applications: YK30F, YK30FAH, YK30FFP
 Model No: YKSG50
 Applications: YK509F, YK509FAH, YK50FFP
 Model No: YKGS75
 Applications: YK759F, YK759FAH


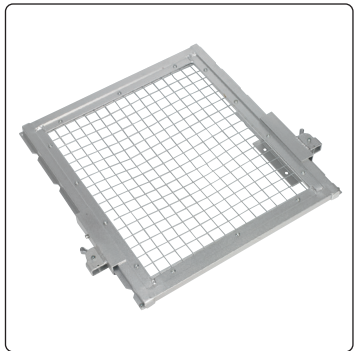


4. ASSEMBLY/ OPERATION

- 4.1. Choose which side of the floor press to fit the guard, fix the guard support brackets to the table using the pre-drilled holes and fixings provided. See figs.1&2. Ensure the brackets are fitted with the locks on the outside and the correct way up as fig.1.

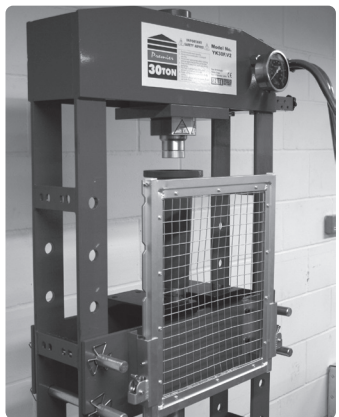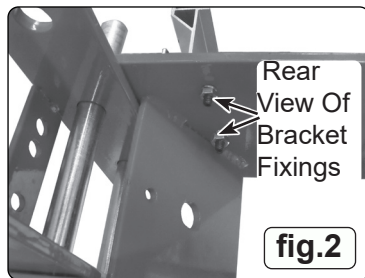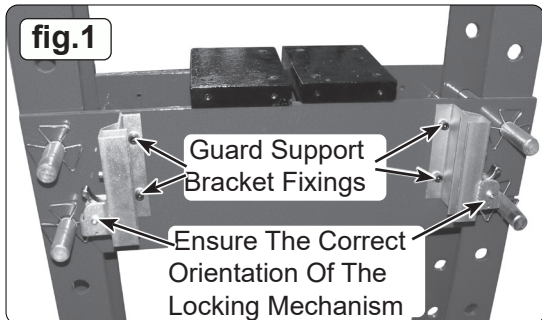

- 4.2. Take the guard and slide it into the brackets from above; the guard has a stop on either side at the top of the frame, this should be uppermost and facing towards the operator fig.3.

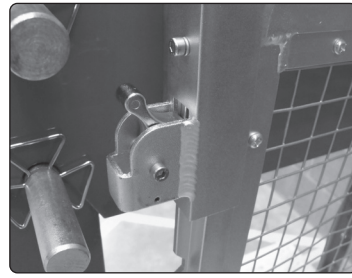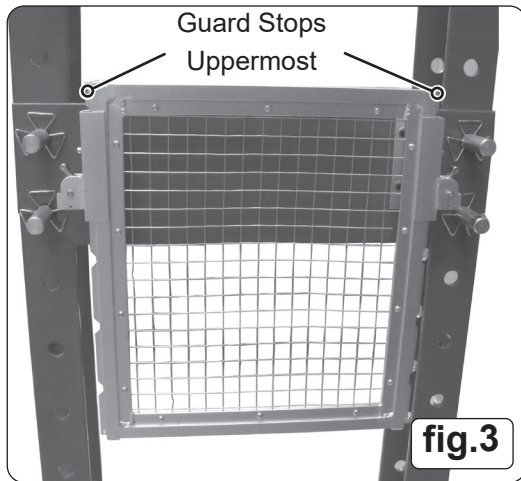

- 4.3. Pull the locks back on either side and lower the guard all the way down.
CAUTION! The guard will drop freely until it reaches the stops.
- 4.4. To raise the guard to one of the five height increments, pull up the guard and the spring loaded locking clips will snap into position at the desired height.



ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.

Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR



01284 757500



01284 703534



sales@sealey.co.uk



www.sealey.co.uk